



Feedback and Control Systems

Recall that for LTI systems we have:



$$y(t) = (g \star u)(t)$$

(time domain, i.c.=0)




$$Y(s) = T(s)U(s)$$

(complex domain, i.c.=0)

We shall work in the complex domain (a.k.a. frequency domain):

Example:

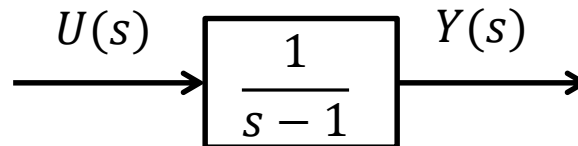


$$T(s) = \frac{1}{s-1}, \quad s^* - 1 = 0 \Rightarrow \underbrace{s^*}_{\text{pole}} = 1 \quad R_e(s^*) > 0 \quad (\text{unstable system})$$

If perturbed from the equilibrium $x_e = 0$ the system would never come back to x_e (in fact it would explode)

In particular, if any non-trivial input $u(t)$ is applied, the system's output $y(t)$ would exponentially diverge!

Simple concept—feedback stabilization

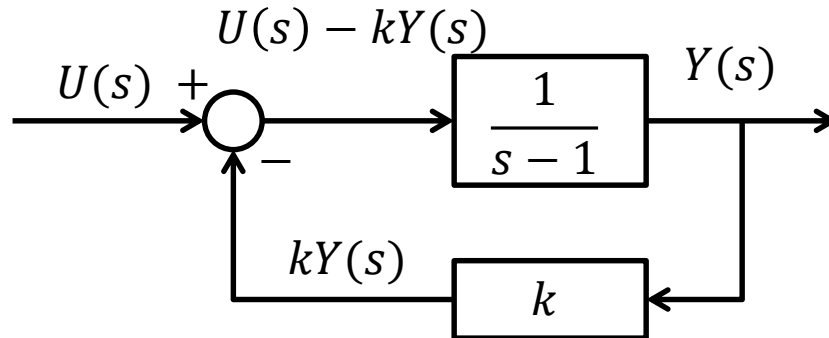


$$\begin{aligned}
 Y(s) &= \frac{1}{s-1} [U(s) - kY(s)] \\
 Y(s)(s-1) &= U(s) - kY(s) \\
 Y(s)(s-1+k) &= U(s) \\
 Y(s) &= \frac{1}{s-1+k} U(s)
 \end{aligned}$$

The pole: $s^* - 1 + k = 0 \Rightarrow s^* = 1 - k$

For stability we need: $R_e(s^*) < 0$, therefore $1 - k < 0 \Rightarrow k > 1$.

Conclusion: the presence of negative feedback with a sufficiently high gain k stabilizes the system.

The basic idea behind control is simple.

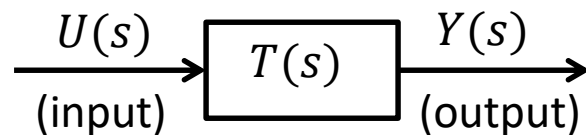


We want: $y(t) \rightarrow \underbrace{y_R(t)}_{\text{reference}}$ (asymptotically)

Goal: find $u(t)$ that will make this possible

Open-loop Control

Example: canonical 1st order system

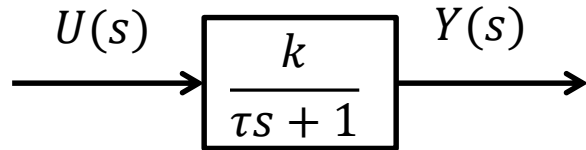

Assume: $y_R(t) = h(t)$ (Heaviside function)


Claim: $u(t) = \frac{1}{k}h(t)$ will achieve $y(t) \rightarrow y_R(t)$ as $t \rightarrow \infty$

$$\lim_{t \rightarrow \infty} y(t) = \lim_{s \rightarrow 0} sY(s) = \lim_{s \rightarrow 0} sT(s)U(s) = \lim_{s \rightarrow 0} s \frac{k}{\tau s + 1} \frac{1}{ks} = \lim_{s \rightarrow 0} \frac{1}{\tau s + 1} = \underbrace{1}_{y_R(t)}$$

This control strategy is called open-loop control. It is not very efficient.

- If the parameters k and τ are not accurately estimated, $y(t)$ will diverge from $y_R(t)$
- If the system is affected by a disturbance $d(t)$, $y(t)$ will not follow $y_R(t)$

Feedback Control

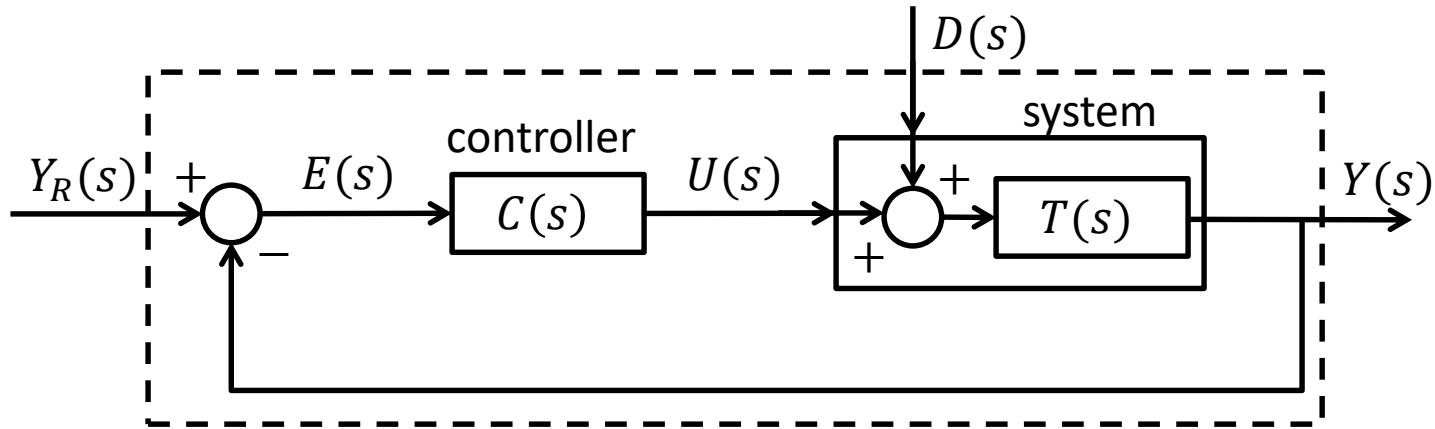

Let us calculate the transfer function. Keep in mind that this is a MIMO system, as there are two inputs (Y_R and D) and one output (Y).

$$\begin{aligned} Y(s) &= T(s)[D(s) + U(s)] \\ Y(s) &= T(s)[D(s) + C(s)E(s)] \\ Y(s) &= T(s)[D(s) + C(s)(Y_R(s) - Y(s))] \\ Y(s) &= T(s)D(s) + T(s)C(s)Y_R(s) - T(s)C(s)Y(s) \\ Y(s)[1 + T(s)C(s)] &= T(s)C(s)Y_R(s) + T(s)D(s) \\ Y(s) &= \frac{T(s)C(s)}{[1 + T(s)C(s)]} Y_R(s) + \frac{T(s)}{[1 + T(s)C(s)]} D(s) \end{aligned}$$

Goal: we want $y(t)$ to track $y_R(t)$ (asymptotically) and we want to reject the disturbance $d(t)$ (asymptotically). Can we do this?

How do we choose $C(s)$ (the controller)?

Example: $T(s) = \frac{k}{\tau s + 1}$ 1st order system

$C(s) = k_p$ - proportional controller (static system)

$$Y(s) = \frac{\frac{k}{\tau s + 1} k_p}{\left[1 + \frac{k}{\tau s + 1} k_p\right]} Y_R(s) + \frac{\frac{k}{\tau s + 1}}{\left[1 + \frac{k}{\tau s + 1} k_p\right]} D(s)$$

$$Y(s) = \frac{kk_p}{\tau s + 1 + kk_p} Y_R(s) + \frac{k}{\tau s + 1 + kk_p} D(s)$$

It may be challenging to test the behavior of the closed-loop system for arbitrary Y_R and D . Typically, unit-step changes are assumed, i.e. $Y_R = \frac{1}{s}$ and $D = \frac{1}{s}$

Therefore: $Y(s) = \frac{kk_p}{\tau s + 1 + kk_p} \frac{1}{s} + \frac{k}{\tau s + 1 + kk_p} \frac{1}{s}$

$$\begin{aligned} \lim_{t \rightarrow \infty} y(t) &= \lim_{s \rightarrow 0} sY(s) = \lim_{s \rightarrow 0} s \left(\frac{kk_p}{\tau s + 1 + kk_p} \frac{1}{s} + \frac{k}{\tau s + 1 + kk_p} \frac{1}{s} \right) \\ &= \underbrace{\frac{kk_p}{1 + kk_p}}_{\text{want this to be 1}} + \underbrace{\frac{k}{1 + kk_p}}_{\text{want this to be 0}} \end{aligned}$$

If k_p is very large ($k_p \gg k$): $\frac{kk_p}{1+kk_p} \rightarrow 1$, and $\frac{k}{1+kk_p} \rightarrow 0$

however, the tracking will not be perfect (there will be little bias in $y(t)$).

$C(s) = k_d s$ - differential controller

$$Y(s) = \frac{\frac{k}{\tau s + 1} k_d s}{\left[1 + \frac{k}{\tau s + 1} k_d s\right]} Y_R(s) + \frac{\frac{k}{\tau s + 1}}{\left[1 + \frac{k}{\tau s + 1} k_d s\right]} D(s)$$

$$Y(s) = \frac{kk_d s}{\tau s + 1 + kk_d s} Y_R(s) + \frac{k}{\tau s + 1 + kk_d s} D(s)$$

Assume $Y_R = \frac{1}{s}$ and $D = \frac{1}{s}$

Therefore: $Y(s) = \frac{kk_d s}{\tau s + 1 + kk_d s} \frac{1}{s} + \frac{k}{\tau s + 1 + kk_d s} \frac{1}{s}$

$$\begin{aligned} \lim_{t \rightarrow \infty} y(t) &= \lim_{s \rightarrow 0} sY(s) = \lim_{s \rightarrow 0} s \left(\frac{kk_d s}{\tau s + 1 + kk_d s} \frac{1}{s} + \frac{k}{\tau s + 1 + kk_d s} \frac{1}{s} \right) \\ &= \underbrace{0}_{\text{wanted this to be 1}} + \underbrace{k}_{\text{wanted this to be 0}} \end{aligned}$$

Conclusion: D-controller has no effect on either the tracking of Y_R or rejection of D .

Finally, $C(s) = k_i \frac{1}{s}$ - integral controller

$$Y(s) = \frac{\frac{k}{\tau s + 1} k_i \frac{1}{s}}{\left[1 + \frac{k}{\tau s + 1} k_i \frac{1}{s}\right]} Y_R(s) + \frac{\frac{k}{\tau s + 1}}{\left[1 + \frac{k}{\tau s + 1} k_i \frac{1}{s}\right]} D(s)$$

$$Y(s) = \frac{k k_i}{(\tau s + 1)s + k k_i} Y_R(s) + \frac{k s}{(\tau s + 1)s + k k_i} D(s)$$

Assume $Y_R = \frac{1}{s}$ and $D = \frac{1}{s}$

Therefore: $Y(s) = \frac{k k_i}{(\tau s + 1)s + k k_i} \frac{1}{s} + \frac{k s}{(\tau s + 1)s + k k_i} \frac{1}{s}$

$$\begin{aligned} \lim_{t \rightarrow \infty} y(t) &= \lim_{s \rightarrow 0} s Y(s) = \lim_{s \rightarrow 0} s \left(\frac{k k_i}{(\tau s + 1)s + k k_i} \frac{1}{s} + \frac{k s}{(\tau s + 1)s + k k_i} \frac{1}{s} \right) \\ &= \underbrace{\frac{k k_i}{k k_i}}_1 + \underbrace{0}_{\text{as desired}} \end{aligned}$$

Conclusion: I-controller achieves exactly what is necessary (asymptotically tracks $y_R(t)$ and rejects $d(t)$). Depending on $T(s)$, a controller is chosen. Combinations of the above controllers are common: $C(s) = k_p + k_d s$ (PD), $C(s) = k_p + k_i \frac{1}{s}$ (PI), $C(s) = k_d s + k_i \frac{1}{s}$ (ID), $C(s) = k_p + k_d s + k_i \frac{1}{s}$ (PID)